

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 24 APR 2015		2. REPORT TYPE		3. DATES COVERED 00-00-2015 to 00-00-2015	
4. TITLE AND SUBTITLE A Constraint Embedding Approach for Complex Vehicle Suspension Dynamics ECCOMAS Thematic Conference on Multibody Dynamics 2015			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC,6501 E. 11 Mile Road,Warren,MI,48397-5000			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES ECCOMAS Thematic Conference on Multibody Dynamics 2015, June 29-July 2, 2015, Barcelona, Catalonia, Spain					
14. ABSTRACT See Report					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

A Constraint Embedding Approach for Complex Vehicle Suspension Dynamics

ECCOMAS Thematic Conference on Multibody Dynamics 2015

Abhinandan Jain*, Calvin Kuo[#], Paramsothy Jayakumar[†], Jonathan Cameron*

*Jet Propulsion Laboratory

California Institute of Technology

4800 Oak Grove Drive, Pasadena, California 91016, USA

jain@jpl.nasa.gov, jmc@jpl.nasa.gov

[#]Department of Mechanical Engineering

Stanford University

Palo Alto, California 91016, USA

calvink@stanford.edu

[†]U.S. Army TARDEC

6501 E 11 Mile Rd

Warren, MI 48397, USA

paramsothy.jayakumar.civ@mail.mil

Abstract

The goal of this research is to achieve close to real-time dynamics performance for allowing the closed-loop testing of unmanned ground vehicles (UGV) for urban as well as off-road scenarios. The overall vehicle dynamics performance is governed by the multibody dynamics model for the vehicle, the wheel/terrain interaction dynamics and the onboard control system. The topic of this paper is the development of computationally efficient and accurate dynamics model for ground vehicles with complex suspension dynamics.

In this paper, we describe the multibody dynamics modeling approach for our reference 4-wheeled vehicle, which has a double wishbone suspension and associated spring-damper unit at each wheel (Figure 1). Each of these wheel suspensions contains a number of articulated bodies with multiple kinematic closed loops. Despite the large number of internal degrees of freedom, due to the constraints, each suspension has only a single effective degree of freedom.

The standard approach for modeling closed-chain system dynamics [1] entails decomposing the system into a tree-topology system (or even a collection of independent bodies) and appending the closed-chain bilateral constraints to the equations of motion. A drawback of this approach is the increased computation for solving the equations of motion. Another serious drawback is the error drift that arises during the integration of the multibody dynamics equations of motion. This error drift is usually handled by the use of a differential-algebraic equation (DAE) solver and error correction algorithms to manage the constraint error over time, adding even more computational cost and accuracy error to the dynamics solution. Our real-time performance needs require us to address these major computational drawbacks of the conventional approaches for closed-chain dynamics.

The recently developed *constrained embedding (CE)* method [2, 3] overcomes these key drawbacks for closed-chain dynamics models. In this paper we describe the specific constraint embedding approach we have used for the multibody modeling of the vehicle and suspension dynamics. The constraint embedded technique converts all constraint loops into variable configuration compound bodies which have the

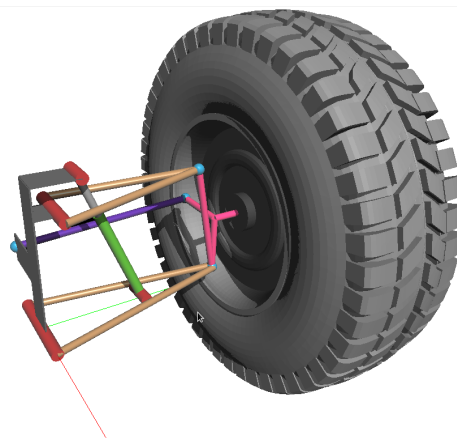


Figure 1: The double wishbone suspension for a single wheel.

same number of degrees of freedom as the number of independent degrees of freedom for the loops they replace. These compound bodies locally handle their internal degrees of freedom and constraint, effectively hiding them from the dynamics solver. The resulting system topology is once again a tree with only inter-body hinges and no bilateral constraints. The benefit of this approach is that the structure-based $O(N)$ tree algorithms can be directly used to solve the dynamics, and this formulation results in an ODE instead of a DAE. Thus extra error control techniques are not needed. This method however is more complex to implement, since the aggregated bodies now have configuration dependent geometry. While CE method shares the minimal coordinates attribute with projection dynamics techniques [1, 4], its advantage lies in the preservation of the system's tree topology that is necessary for the use of the structure-based tree algorithms.

In this paper we describe the CE modeling approach for the individual wheel suspensions, the overall vehicle dynamics model, and the adaptation of the recursive $O(N)$ dynamics algorithm for efficiently solving the equations of motion. While generic iterative methods can be used to solve the kinematics for the loops, we describe methods to increase the efficiency using analytical techniques. We describe the significant performance speed up and accuracy that we obtain compared with the conventional DAE approaches.

References

- [1] E. J. Haug, Elements of Computer-Aided Kinematics and Dynamics of Mechanical Systems: Basic Methods. Springer-Verlag, 1984.
- [2] A. Jain, "Multibody graph transformations and analysis Part II: Closed-chain constraint embedding," Nonlinear Dynamics, vol. 67, no. 3, pp. 2153–2170, Aug. 2012.
- [3] —, Robot and Multibody Dynamics: Analysis and Algorithms. Springer, 2011.
- [4] R. von Schwerin, Multibody system simulation: numerical methods, algorithms, and software. Springer, 1999.